
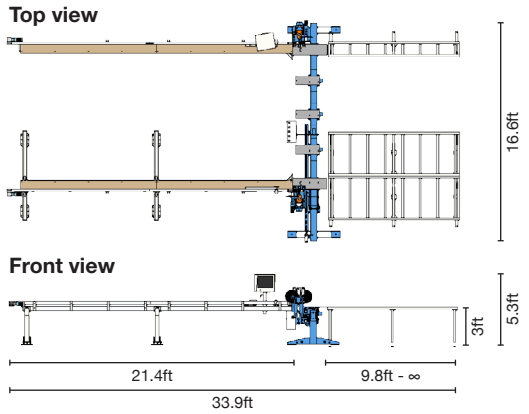


Wall Extruder

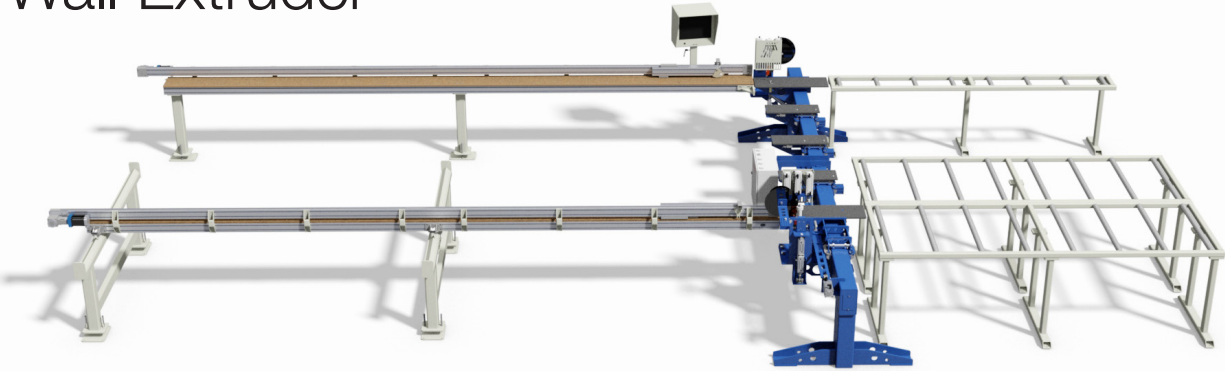

Specifications

Wall height	6 - 12 feet
Nailing cycle time	3 seconds
Air supply required	100 - 110 PSI
Timber widths	2x3, 2x4, 2x6 inch
Throat opening	7 inch
Max Panel Length	20 feet
Power Requirements	20amp, 110v, 1 phase

Features

- Four gun mounted brackets
- Height adjustable nail gun & clamp guarding
- Ergonomic clamp operating system allows for two handed freedom for operators to locate studs and frame while clamping.
- Vertical clamp override mechanism to allow stud adjustment once clamped.
- Features automatic gun indication/lockout system when coil nail feed is empty in any gun.
- Adjustable for wall frame heights from 6 - 12 feet.
- Quick change over from 3 - 4 inch wall thickness.
- Two handed operation safety circuit.

Options

- Left or Right Hand Side Adjustable
- Outfeed Conveyor
- Extended Wall Height Capacity
- Centre Gun Option
- Nail guns can be stick or coil types, but are not included with the machine
- Transfer Table for Sub Assembly





Our feed conveyor not included



Square 1 Design & Manufacture Inc.

For all Sales, Service and Inquiries

Square 1 Design & Manufacture Inc.

400 N. Forsythe Street · Franklin, IN 46131

T: 866-647-7771 · E: sales@SQ-1Design.com

